



## Integrated Station Solutions

Turnkey solutions for your building automation and integration systems.

*Maximum value. Optimal resources. Reduced time to deployment.*

---

Smart Technology. Smart Equipment. Smart Solutions.



## Integrated Station Solutions

LynxSpring Professional Services provides turnkey, integrated station solutions. Our packaged building automation solutions arrive wired, configured, and with pre-loaded software—reducing labor and installation time. Additionally, each solution provides installation and wiring diagrams.

LynxSpring's integrated station solution simplifies project requirements and enables both Niagara-certified field technicians as well as electricians to perform installation services.

### Our Integrated Solutions Include:

#### DISCOVERY

- ✓ Application-Specific Consultation
- ✓ Interior/Exterior Panel Specifications Reviewed
  - Types of Controllers
  - Terminal Strips
  - Relays
  - LCD Display
  - Push Button Options

#### DEVELOPMENT

- ✓ Panel Designed Based on Specifications
- ✓ Niagara Station Developed Specific for the Panel Application

#### DEPLOYMENT

- ✓ Controller Start-Up
  - Niagara Installed
  - Station Loaded
  
- ✓ Panels Tested Before Shipment




*Whether a new project or retrofit—LynxSpring's integrated station solutions include power supplies, and already-wired terminal strips and relays for quick and easy installation.*



## Lynxspring Integration and Start-Up Services

- Industry Standard Panels: ETL/ULA 508A Certified
- Variable Panel Sizes Available
- Includes: Terminal Strips, Power Supplies and Wireways
- Outlet available on request
- 11" x 17" installation and wiring diagrams provided
- All internal control wiring and landed on controller and terminal strips provided.
- Schedule integration and/or controller start-up with Lynxspring. A minimum of 1-week notice is required for scheduling. Contractor shall have a technician on site as verbal instructions are relayed via phone by Lynxspring.
- Remote connectivity required (*Cellular Router available.*)
- Lynxspring will connect remotely and verify connection.
- Lynxspring will integrate the equipment once we verify all devices are discoverable on the BACnet network and all sensors are reading properly.
- Once the integration is complete, each unit is tested including physical verification of starting/stopping and activating cooling/heating (*unoccupied/occupied modes, cooling/heating modes, space sensors to confirm temperature*).

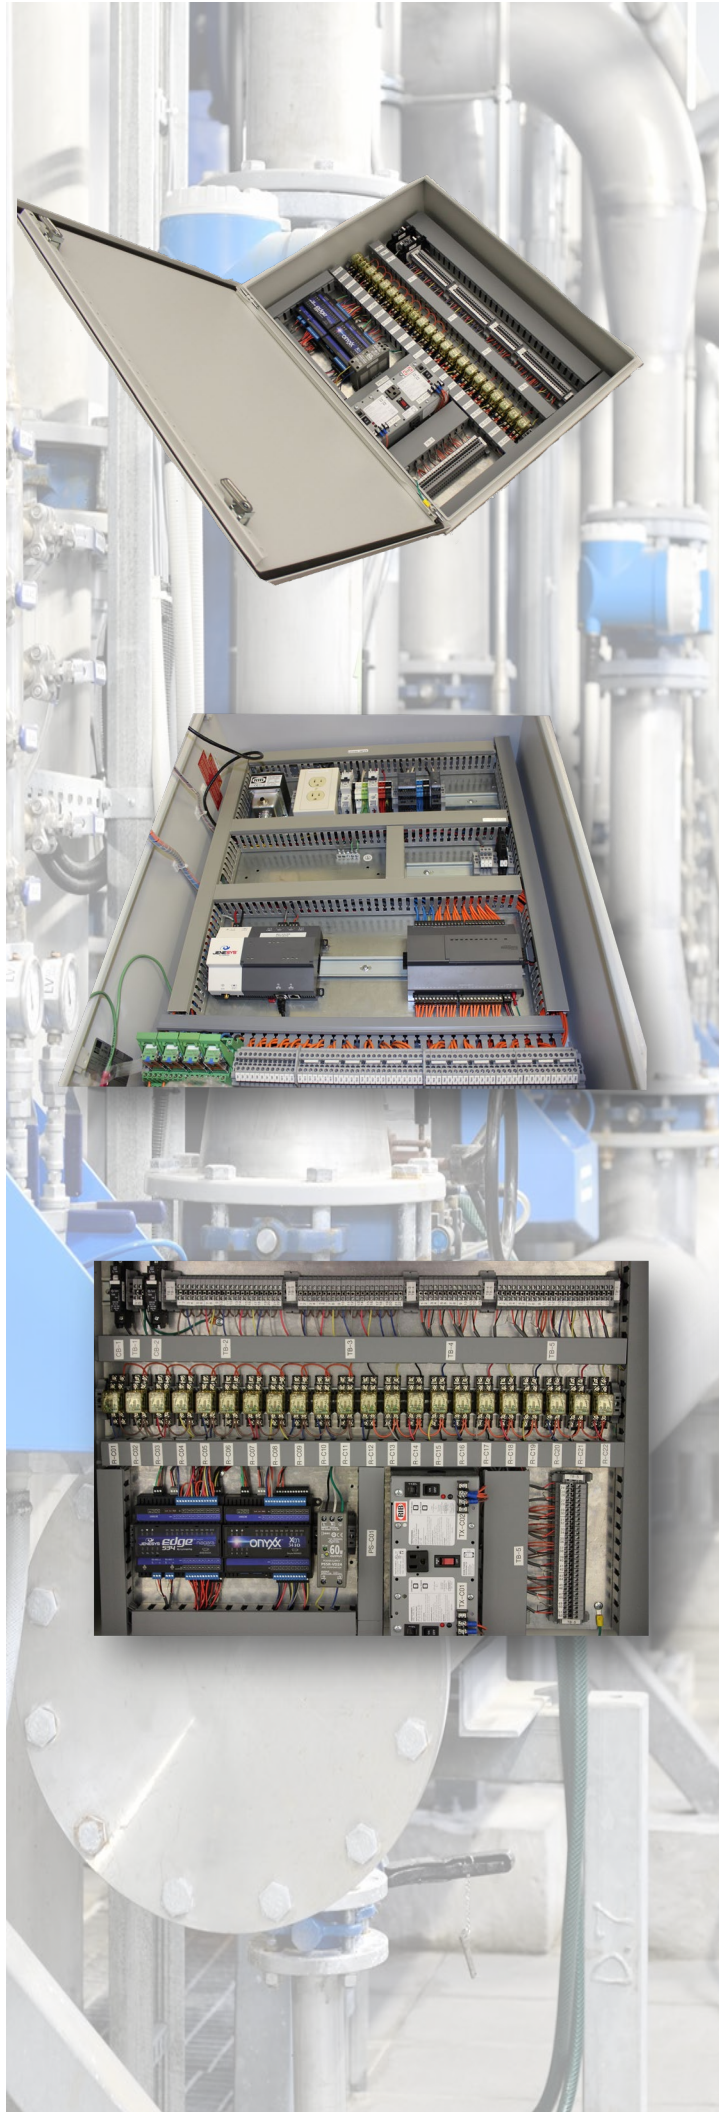



## Building Automation and Integration: *Your Source for Industry Knowledge and Support*

LynxSpring's talented Professional Services team is specifically selected to provide a higher level of support to our customers and to support the growing commercial need for managing smarter buildings. The team consists of experienced professionals in engineering, design, and controller start-up to provide expertise in integration, applications and building controls.

Our Professional Services team has extensive domain knowledge and experience with all types of building equipment including:

- ✓ Chilled Water Plants
- ✓ Heating Water Plants
- ✓ Air Handling Units
- ✓ Heat Pumps/VAV/Fan Coils
- ✓ Lighting Systems
- ✓ Energy Metering
- ✓ Legacy Systems
- ✓ Data Centers



### Want to Request a Quote?

Tell us more about your project  
by completing details online at:

[www.lynxspring.com/professional-services#professional-services-quote](http://www.lynxspring.com/professional-services#professional-services-quote)

(816) 872-0205