

# BW437-RTU-LX Configurable Thermostat for RTU ONYXX® LX STAT-ASC | PRODUCT DATA SHEET

Designed and assembled in Canada

## Description

- ✓ Factory-delivered pre-loaded with a powerful low voltage RTU, HP & AHU application
- ✓ Supports BACnet MS/TP
- ✓ Has 4 AI/BI's, 3 AO's, 6 BO's plus 1 jumper-selectable universal AO/BO
- ✓ Options include: Humidity sensor, PIR & CO2 sensing
- ✓ Certified as a B-ASC (BACnet Application Specific Controller)
- ✓ Requires Onyx LX USB to RS-485 adapter to program with Onyx LX UI
- ✓ To order use part number as per table below:

**ONYXX® LX**  
BY LYNXSPRING



MODEL NUMBER	BUILT-IN HUMIDITY SENSOR	BUILT-IN PIR MOTION SENSOR	BUILT-IN CO2 NDIR SENSOR
BW437-RTU-LX			
BW437MH-RTU-LX	✓	✓	
BW437HC-RTU-LX	✓		✓
BW437MHC-RTU-LX	✓	✓	✓

## Application

This controller is designed to facilitate control and management of equipment typically used in the HVAC industry. It allows powerful yet flexible solutions that can be tailored and sized according to any project needs. It features a very flexible I/O set capable of meeting all terminal equipment control needs in the market.

## Technical Specifications

### POWER SUPPLY

24 Vac/dc ± 15%

### CURRENT CONSUMPTION

1.5 VA controller only

Up to 96 VA total maximum on all 7 BO's @ 0.5A maximum per output

### INPUTS

4 x AI/BI's universal inputs

- Thermistor 10 K Ω (type 2 or 3)
- Dry contact, 500 ms minimum (On-Off)
- Voltage 0 - 10 Vdc (Input impedance of 100 K Ω)
- Resolution: 12 bits (4,096 segments)

### OUTPUTS

6 x BO's Solid State

- 10 to 30 Vac/dc, 0.5 A maximum
- Up to 96 VA total maximum on all 7 BO's @ 0.5 A maximum per output
- Sink or source main power feed
- Built-in overcurrent protection @ 4 A max
- Solid State BO's can be used as pulse outputs

3 x AO's

- Voltage 0 - 10 Vdc linear
- 1 x universal AO/BO's
- Jumper selectable
- Same specification as above

### REAL TIME CLOCK (RTC)

Built in with one-week capacitor backup once charged

### MICROPROCESSOR

STM32 (ARM Cortex™ M3)  
32 bits, 72 MHz

### MEMORY

Flash: 768 KB non-volatile for the application program  
RAM: 96 KB

### RS485 BACNET MS/TP COMMUNICATION SPEED

9600, 19200, 38400, 76800 Bps

### CONTROLLER ADDRESSING

Via keypad configuration

### EXTERNAL CONNECTIONS



Mini USB connector allows local access to the MS/TP network.  
Requires the USB to RS-485 adapter: USB-MSTP-LX.

### HUMIDITY SENSOR (SENSIRION SHT31)

±2 @ 0-100% rH

### PIR SENSOR

- Operating Principle: Passive Infrared
- Detection Angle: 100 degrees
- Detection Distance: 4 m (13 ft.) maximum
- Detection Area

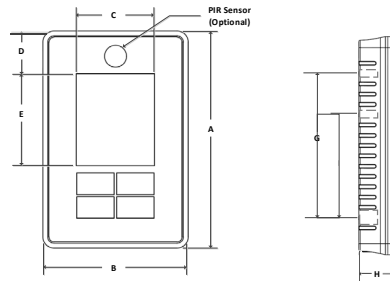

BACnet is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International. BTL is a registered trademark of BACnet International.

### CO2 SENSOR SENSIRION SCD30

- Operating Principle: Self calibrating, non-dispersive infrared (NDIR)
- Sensor Range: 0-5000 ppm
- Accuracy: ± 30 ppm @ 3% of reading
- Accuracy is valid after a minimum of 3 weeks of continuous operation
- Response Time T63: 2 minutes

### BACKLIGHT DISPLAY / LCD

Multi-HVAC system symbols, time display, 4 segment main numeric display with one decimal

### COMMUNICATION PROTOCOLS

BACnet MS/TP

### DIMENSIONS

B 83 mm x A 124 mm x 20 mm  
B 3.25 in. x A 4.88 in. x 0.8 in.

### WIRE SIZE

18-24 AWG acceptable; 18 AWG recommended

### STOCKING TEMPERATURE

-30 °C to 50 °C / -22 °F to 122 °F

### OPERATING CONDITIONS

-25 °C to 45 °C / -13 °F to 113 °F  
10% to 90% rH without condensation

### WEIGHT

120 g. / 0.25 lb.

### MOUNTING TYPE

Standard 2 in. x 4 in. electrical junction box

### WARRANTY

1 year

### ENCLOSURE

White color, ABS material UL94V0

### CERTIFICATIONS

UL 916 Energy Management Equipment  
BTL listed: B-ASC, BACnet Application Specific Controller



2900 NE Independence Ave  
Lees Summit, MO 64064  
sales@lynxspring.com  
1 (877) 649-5969

**LYNXSPRING®**  
www.lynxspring.com

© 2021 Lynxspring, Inc.  
All Rights Reserved  
Revised 5/17/2021  
Onyx-BW437RTU-LX-DS-V1.2