

JENEsys PC-9000

Controller

PRODUCT DEFINITION

The JENEsys® PC-9000 is a compact, embedded IoT controller and server platform for connecting multiple and diverse devices and sub-systems. With Internet connectivity and web-serving capability, the JENE PC-9000 controller provides integrated control, supervision, data logging, alarming, scheduling and network management. It streams data and rich graphical displays to a standard web browser via an Ethernet or wireless LAN, or remotely over the Internet.

The licensing model for the JENE PC-9000 controller is simplified and features standard drivers, along with optional IO and field bus expansion modules for ultimate flexibility and expandability. The JENE PC-9000 controller operates with Niagara 4, the latest version of the Niagara Framework®, for optimum performance. In larger facilities, multi-building applications and large-scale control system integrations, Niagara 4 Supervisors can be used with JENE/JACE controllers to aggregate information, including alarms, and historical and real-time data, to create a single, unified application.



HARDWARE SPECIFICATIONS

1.6GHz NXP iMX8M+ Quad Core CPU

2GB LPDDR4 RAM

8GB onboard EMMC storage

8GB micro-SD card (backup media)

Wi-Fi (Client or WAP)

- Wi-Fi 5 (802.11ac)
- 1x1 802.11 a/b/g/n/ac
- Configurable radio (Off, WAP, or Client)
- WPA2PSK/WPA3PSK supported
- Only available for wireless model

USB type C connector

- Debug port

(2) isolated RS-485 with selectable bias and termination

(2) 10/100/1000MB Ethernet ports

Secure boot

*Supply requirements: 24VAC rated at 24VA minimum, or 24VDC rated at 1A (24W) minimum

Non-Wi-Fi: Supports Niagara 4.13 and later
Wi-Fi: Supports Niagara 4.15 and later

Real-time clock

Batteryless

**Niagara Enterprise Security requires four hours of standby power*

EXPANSION MODULE AND IO CONFIGURATIONS

MAXIMUM EXPANSION (MODULES SUPPORTED)

- NPB-8000-LON (4)
- NPB-8000-232 (4)
- NPB-8000-2X-485 (2)

MAXIMUM IO (MODULES SUPPORTED)*


- IO-R-16 (16)*
- IO-R-34 (8)*

**See JACE IO R data sheet for configuration details*

MAXIMUM NIAGARA ENTERPRISE SECURITY (MODULES SUPPORTED)*

- T-SEC-R2R*
- T-SEC-RIO*

**16 total each or combined*

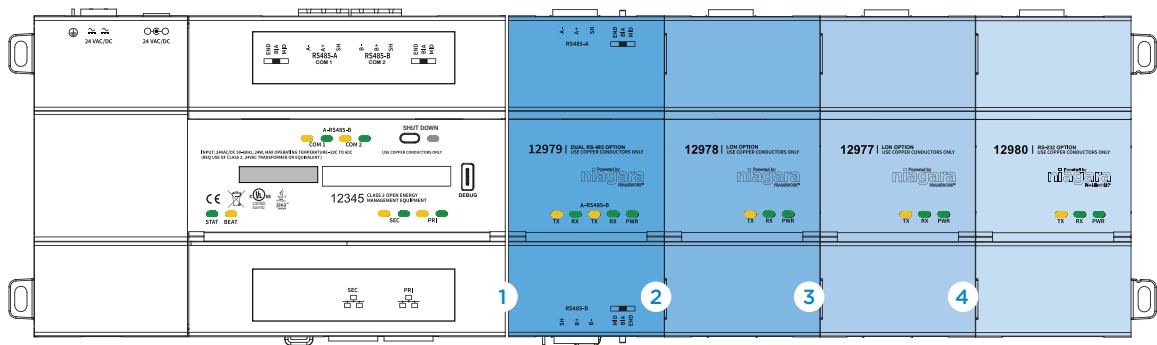

MAXIMUM COMBINATIONS


EXPANSION 1	EXPANSION 2	EXPANSION 3	EXPANSION 4
232 or LON	232 or LON	232 or LON	232 or LON
485 485	232 or LON	232 or LON	232 or LON
485 485	485 485	232 or LON	
485 485	485 485		

Expandability is dependent on the type of expansion module used



JENEsys® PC-9000 CONTROLLER MOUNTING & DIMENSIONS

- 1 JENE PC-9000 controller. Allow at least 1.5" (38mm) clearance around all sides and minimum 3" (76mm) at bottom for optional Wi-Fi antenna
- 2 Expansion module. Up to four (4) may be used.
See "Expansion Module and IO Configurations"
- 3 Distances between center of tabs from one unit to another unit

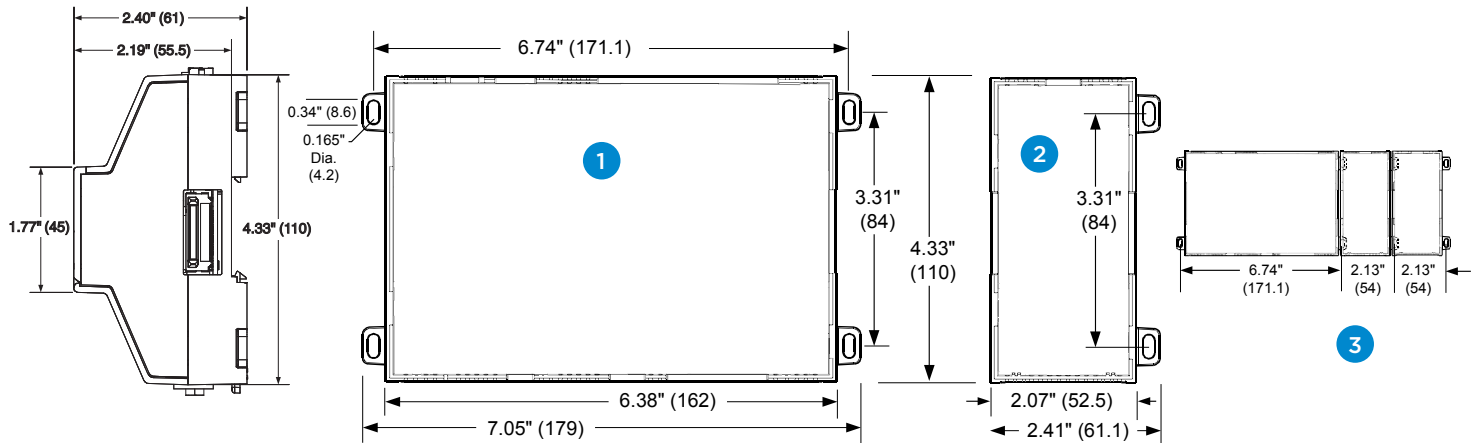

Compatible with (DIN43880) enclosures

Suitable for mounting to a panel or to an EN50022 standard 35mm rail

Visio stencils available upon request

AGENCY CERTIFICATIONS

- UL 916
- CE EN 61326-1
- RCM
- FCC Part 15 Subpart B, Class B
- FCC Part 15 Subpart C
- C-UL listed to Canadian Standards Association (CSA) C22.2 No. 205-M1983 "Signal Equipment"
- 1999/5/EC R&TTE Directive
- SRRC
- RSS
- RoHS

ENVIRONMENTAL SPECIFICATIONS

- **Operating temperature:** -20-60°C
- **Storage temperature:** -40-85°C
- **Humidity:** 5%-95% — Non condensing
- **Shipping & vibration:** ASTM D4169, Assurance Level II
- **MTTF:** 10 years+

JENEsys® PC-9000 ORDERING INFORMATION

Contact Us: [Here](#)

Pricing Available: [Lynxspring's Resources Partner Portal](#)

© 2026 Lynxspring Inc. All rights reserved. Complete Confidentiality, Trademark, Copyright and Patent notifications can be found on Lynxspring's corporate website on our [LEGAL](#) page.

NOTICE: All information contained herein is, and remains the property of Lynxspring, Incorporated. The intellectual and technical concepts contained herein are proprietary to Lynxspring, Inc., may be covered by U.S., and Foreign Patents, patents in process, and are protected by trade secret or copyright law. Lynxspring®, JENEsys®, JENEsys Edge®, Onyx® and Helix® are registered trademarks of Lynxspring, Inc. Niagara Framework® is a registered trademark of Tridium, Inc. All other trademarks and registered trademarks are properties of their respective owners.